

# Manual Installation Wiring

## (HSRadStatWifi) Programmable




### Application:

Hydronic Heating, Connections R,W,C to be connected to Zone by Pump, Valve, Actuator Controllers.

### Specifications:

- Power Supply: 24Vac 60Hz
- Temperature Setting Range: + - 1 Deg F
- Temperature Accuracy: + - 1 Deg F
- Remote Sensor: NTC10K
- Power Consumption: < 2 Watts
- Grade of protection: IP 30
- Installation Type: Surface Mount
- Mode: Heat/Cool/Auto
- Accuracy: .5 Deg F
- Approval: FCC and CE
- IP Grade: IP 30
- Programmable
- Housing Material: PC+ABS
- Screen Display: Pixel/Captive Touch
- Humidity Sensor: +- 3%
- Fan Control: Auto/On/3-Speed
- Language: Multi Language
- Wifi Embedded: 2.4G, 802.11 bgn
- Wifi App. "Myhouse Pro"

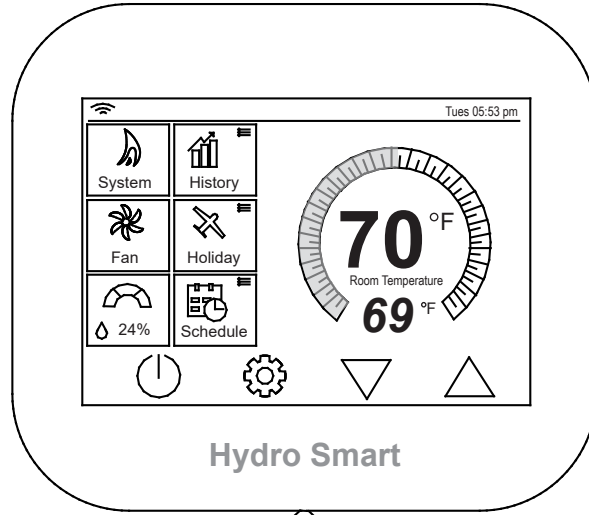

## Wiring - Boiler System



### HSRadStatWifi

